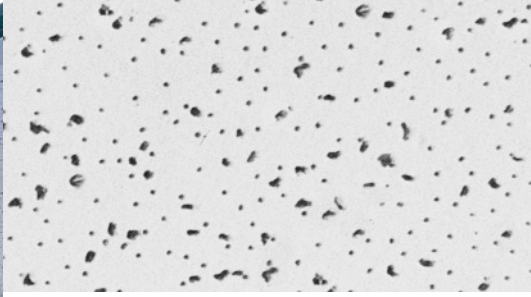


Radars™

Medium textured panel



















**Features and Benefits**

- Non-directional pattern with a fresh, clean appearance offers fast, efficient installation.
- Economical, all-purpose ceiling pattern offered in many sizes.
- Available in several standard colors for design flexibility.
- Optional FIRECODE™ formulation designed to meet life safety codes.

**Applications**

- Schools
- Corridors
- Offices
- Retail stores

Edge	Panel Size		Item No.  UL Classified				Color <sup>4</sup>	Grid Options	Recycled Content <sup>6</sup>	Panel Cost	
	Imperial	Metric (mm) <sup>1</sup>	Class <sup>2</sup>	Imperial	NRC	CAC Min.					LR <sup>3</sup>
	2' x2' x5/8"			2115	.55	35	.84	White	A	46%	\$
	2' x4' x5/8"		Class A	2310	.55	35	.84	White	A, B	25%	\$
	600x1200x15			ME2310							
	2' x4' x5/8"			2315	.55	35	.84	White	A	46%	\$
	2' x4' x5/8"		Class A	2310P <sup>5</sup>	.55	35	.84	White	A, B	25%	\$
	2' x5' x5/8"		Class A	2619	.55	35	.84	White	A, B	25%	\$
	20" x60" x5/8"		Class A	2617	.55	35	.84	White	A, B	25%	\$
	2' x4' x3/4"		Class A	2311	.60	35	.84	White	A, B	25%	\$
	30" x60" x3/4"		Class A	2618	.60	35	.84	White	A, B	25%	\$
(SLT) 	2' x2' x5/8"		Class A	2120	.55	33	.84	White	D	25%	\$
	600x600x15			ME2120							
	2' x2' x5/8"			2125	.55	35	.84	White	D	46%	\$
	2' x4' x5/8"		Class A	2320	.55	35	.84	White	D	25%	\$
	2' x2' x3/4"		Class A	2121	.60	35	.84	White	D	25%	\$
(FLB) 	2' x2' x5/8"		Class A	2130	.55	33	.84	White	E, F, G	25%	\$
<b>RADAR Tile<sup>6</sup></b> (BESK) 	12" x12" x5/8"		Class A	2990	.50	40	.84	White	H	25%	\$\$\$
<b>Grid Profile Options</b>											

**ASTM E1264 classification**

Type III, Form 2, Pattern CD

**ASTM E84 surface burning characteristics**

Class A

Flame spread: 25

Smoke developed: 10

**Imperial weight**

.69-.81 lb./ft.<sup>2</sup> (Class A 5/8" panels)

1.00 lb./ft.<sup>2</sup> (Class A 3/4" panels)

1.10 lb./ft.<sup>2</sup> (Class A 5/8" tile)

1.15 lb./ft.<sup>2</sup> (FIRECODE™ panels)

**Metric weight**

3.37-3.95 kg/m<sup>2</sup> (Class A 15 mm panels)

**Thermal resistance**

R-1.5 (Class A, 5/8" panels and tile)

R-1.7 (Class A, 3/4" panels)

R-1.4 (Class A, 15 mm panels)

R-1.6 (FIRECODE, 5/8" panels)

**Maximum backloading**

See Warranty for details.

**Maintenance**

Can be cleaned easily with a soft brush or vacuum.

**Footnotes**

1. Metric available in White only.

2. Fire-rated items: see UL design details.

3. LR values are shown as averages.

4. See color selectors for more information.

5. Includes plastic coating, Gardner-Scrubability-tested to 3,000 cycles (ASTM D246).

6. Contact USG for adhesive recommendation for 12" x 12" glue-up applications.

7. Maximum 2' x 2' for square panels.

**SAFETY FIRST!**

Follow good safety practices.

Read material safety data sheets and related literature on products before specification and/or installation.