


# Radars™ *ClimaPlus* High CAC, High NRC



Medium textured panel

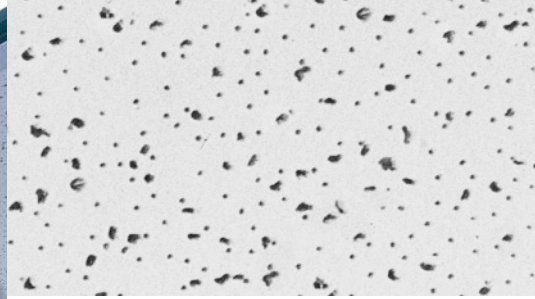

#### Features and Benefits

- Non-directional pattern with a fresh, clean appearance offers fast, efficient installation.
- Economical, all-purpose ceiling pattern in various sizes.
- High CAC minimum of 40 increases room-to-room speech privacy.
- High NRC .70 for greater sound control in open-plan areas.
- *CLIMA PLUS*™ 15-year System Warranty to withstand conditions up to 104 °F (40 °C)/90% relative humidity without sag when used with USG's *DONN*® Brand Suspension Systems.
- *FIRECODE*™ formulation designed to meet life safety codes.

#### Applications

- Conference rooms
- Open office plans
- Privacy rooms

# Radar <sup>TM</sup> *ClimaPlus* High CAC, High NRC

Acoustical Ceilings



UL Classified

Edge	Panel Size	Class <sup>1</sup>	Item No.	NRC	CAC Min.	LR <sup>2</sup>	Color	Grid Options	Recycled Content <sup>3</sup>	Panel Cost
RADAR High NRC Panels	(SQ) 		22111	.70	35	.84	White	A, B, C	50%	\$
			22311	.70	35	.84	White	A, C	50%	\$
	(SLT) 		22121	.70	35	.84	White	D	50%	\$
	(FLB) 		22127	.70	35	.84	White	E, F, G	50%	\$
		<b>C</b> DONN DXW™	<b>D</b> DONN DX/DXL	<b>E</b> CENTRICITEE DXLT	<b>F</b> FINELINE® 1/8	<b>G</b> FINELINE				
<b>Grid Profile Options</b>										

**ASTM E1264 classification**  
Type III, Form 2, Pattern CD  
**ASTM E84 surface burning characteristics**  
Class A  
Flame spread: 25  
Smoke developed: 10

**Weight**  
1.14 lb./ft.<sup>2</sup>  
**Thermal resistance**  
R-1.68 (High CAC panels)  
R-2.13 (High NRC panels)

**Maximum backloading**  
See Warranty for details.  
**Maintenance**  
Panels can be cleaned easily with a soft brush or vacuum.

**Footnotes**  
1. Fire-rated items: See UL design details.  
2. LR values are shown as averages.  
3. For details, see the Recycled Content selector.

**SAFETY FIRST!**  
Follow good safety practices. Read material safety data sheets and related literature on products before specification and/or installation.

